


MULTIDRILL ML



ITALIAN DRILLING RIGS
MANUFACTURERS SINCE 1964



Dimensions

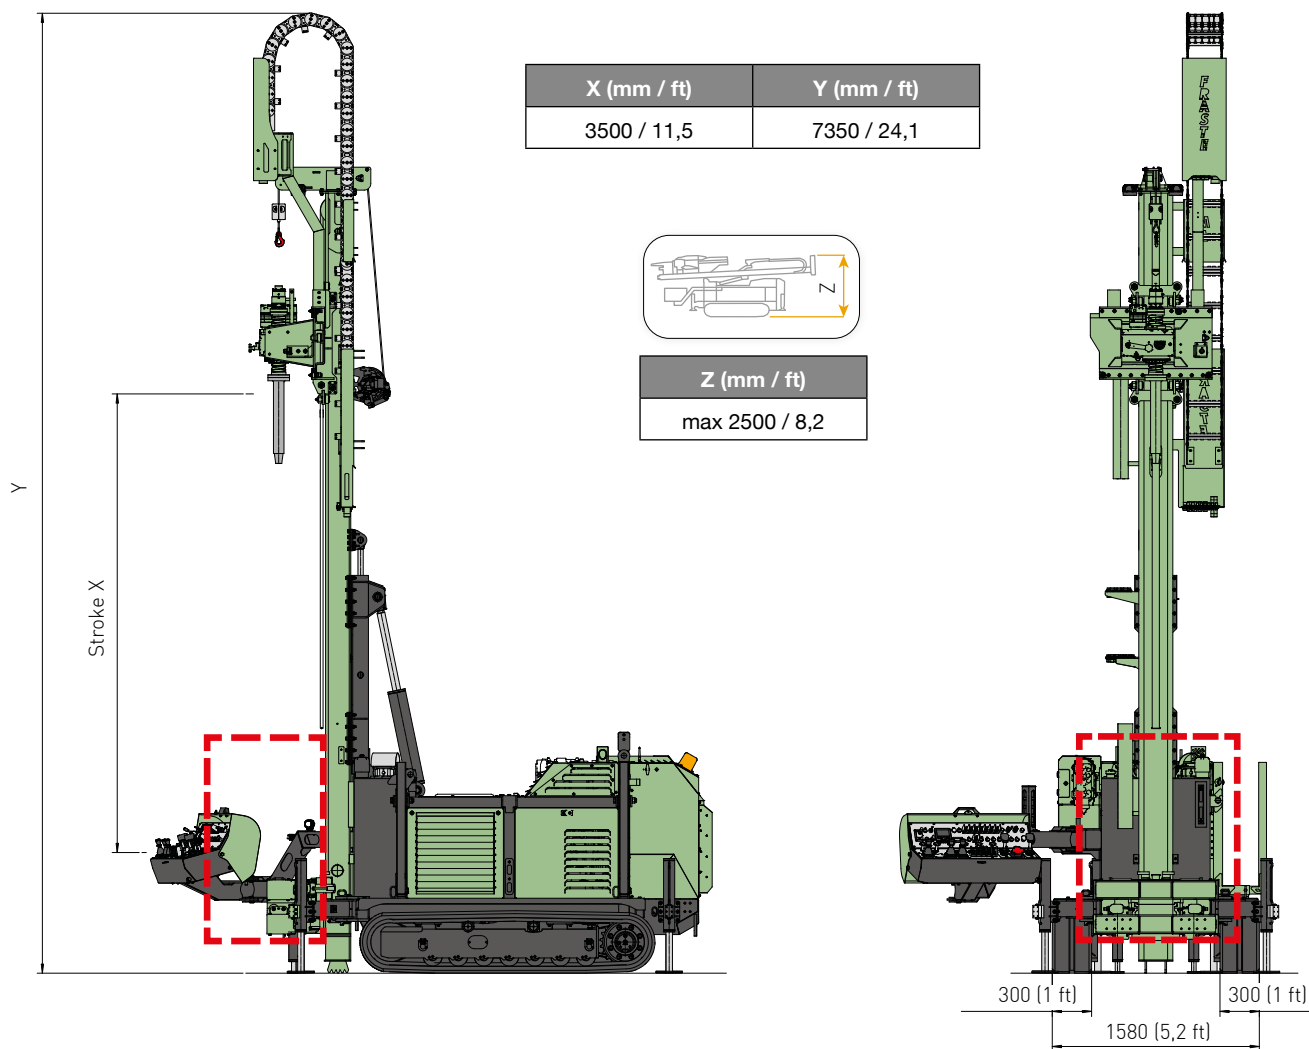

I dati esposti sul presente catalogo possono variare senza preavviso - Specifications may change without notice

MOTORE DIESEL	DIESEL ENGINE	
Potenza	Power	CAT C3.6 - Stage V - Tier 4 - 90 Kw (120 Hp) KUBOTA V3800 - Stage IIIA - Tier 3 - 74 Kw (100 Hp)
ANTENNA	MAST	
Corsa testa di rotazione	Rotary head stroke	3500 mm (11,5 ft)
Tiro	Pull-up	6000 daN (13488 lbf)
Spinta	Pull-down	3100 daN (6969 lbf)
TESTA ROTANTE	ROTARY HEAD	
Coppia max.	Max. torque	1180 daNm (8703 ft lbf)
Velocità max.	Max. speed	1100 rpm
MORSA	CLAMP	
Diametro	Diameter	40-250 mm (1,6"- 10")
PESO	WEIGHT	~6000 Kg (~13227 lb)

ML

Efficient, Fast,
Great Reliability



MD ML

Efficient, Fast, Great Reliability



ACCESSORI - ACCESSORIES

Verricello	Main Winch	2000 daN - 55 mt/min - (4496 lbf - 180 ft/min)
Pompa Triplex	Triplex Pump	160 lt/min - 48 bar - (43 gpm - 695 psi)
Pompa monovite	Screw pump	600 lt/min - 12 bar - (159 gpm - 174 psi)
Pompa schiuma	Foam pump	34 lt/min - 38 bar - (9 gpm - 550 psi)
Lubrificatore di linea	Line lubricator	8,5 lt/min (2,25 gpm)
SPT idraulico	Hydraulic SPT device	760 mm - 63,5 daN (30" - 142 lbf)
Radiocomando	Remote radio control	-

ALTRI OPTIONAL DISPONIBILI A RICHIESTA - OTHER OPTIONALS ARE AVAILABLE ON REQUEST

