


MULTIDRILL XL MAX



ITALIAN DRILLING RIGS
MANUFACTURERS SINCE 1964



Dimensions

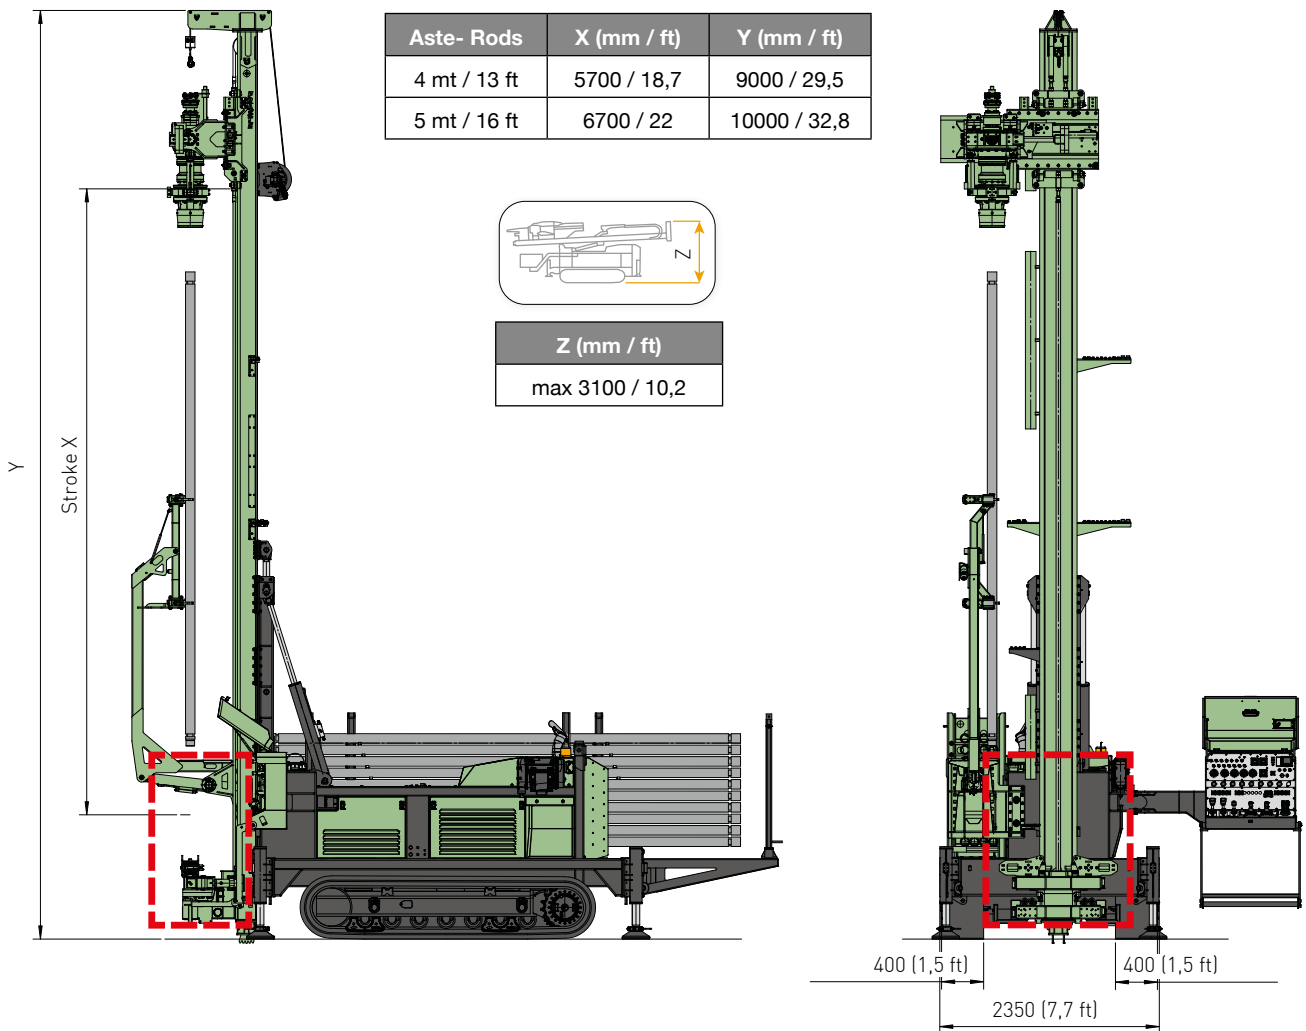


I dati esposti sul presente catalogo possono variare senza preavviso - Specifications may change without notice

MOTORE DIESEL	DIESEL ENGINE	
Potenza	Power	CAT C4.4 - Stage V - Tier 4 F - 129,4 Kw (173,5 Hp) CAT C7.1 - Stage IIIA - Tier 3 - 129 Kw (173 Hp)
ANTENNA	MAST	
Corsa testa di rotazione	Rotary head stroke	5700-6700 mm (18,7-22 ft)
Tiro	Pull-up	10000-12000 daN (22480-26977 lbf)
Spinta	Pull-down	6200-7200 daN (13938-16186 lbf)
TESTA ROTANTE	ROTARY HEAD	
Coppia max.	Max. torque	1860 daNm (13718 ft lbf)
Velocità max.	Max. speed	1125 rpm
MORSA	CLAMP	
Diametro	Diameter	60-355 mm (2,3"-14")
PESO	WEIGHT	~14500 Kg (~31967 lbf)

XL MAX

Compact,
Multipurpose.

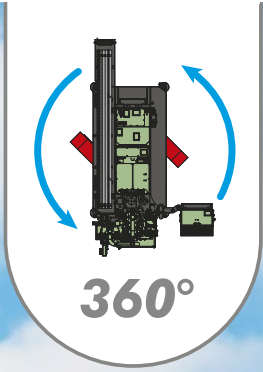

MD XL MAX

Compact, Multipurpose.



ACCESSORI - ACCESSORIES

Verricello	Main Winch	3600 daN - 35 mt/min - (8093 lbf - 115 ft/min)
Verricello wire line	Wire line winch	1000 daN - 100 mt/min - (2248 lbf - 328 ft/min)
Pompa Triplex	Triplex pump	200 lt/min - 70 bar - (53 gpm - 1015 psi)
Pompa monovite	Screw pump	900 lt/min - 14 bar - (159 gpm - 174 psi)
Pompa schiuma	Foam pump	80 lt/min - 40 bar - (21 gpm - 580 psi)
Lubrificatore di linea	Line lubricator	8,5 lt/min (2,25 gpm)
Radiocomando	Remote radio control	-

ALTRI OPTIONAL DISPONIBILI A RICHIESTA - OTHER OPTIONALS ARE AVAILABLE ON REQUEST

