


MULTIDRILL PL G




ITALIAN DRILLING RIGS
MANUFACTURERS SINCE 1964



Dimensions

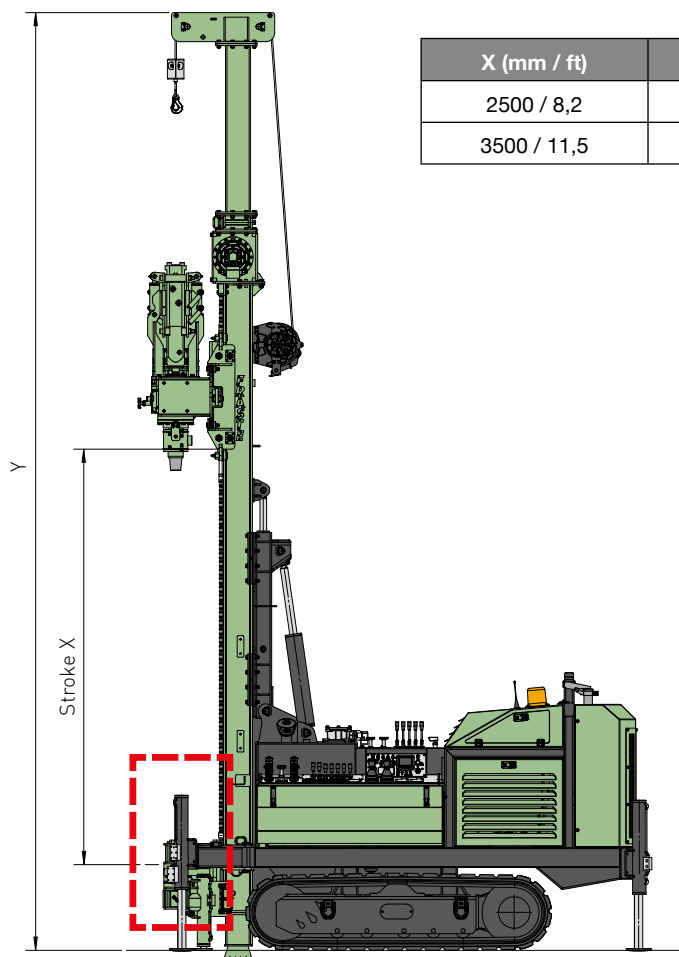

X (mm / ft)	Y (mm / ft)
2500 / 8,2	5650 / 18,5
3500 / 11,5	6650 / 21,8

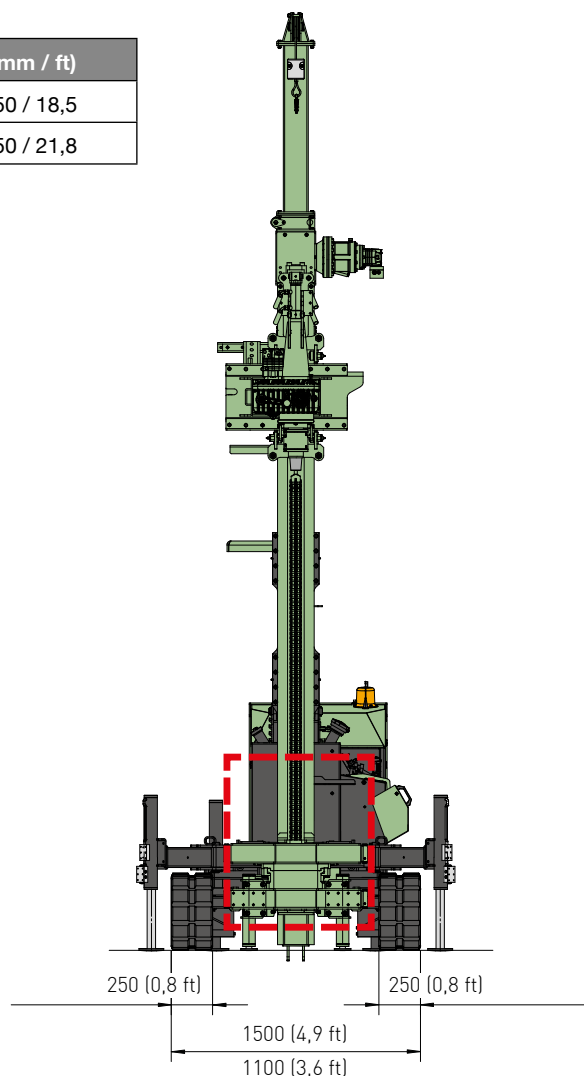

I dati esposti sul presente catalogo possono variare senza preavviso - Specifications may change without notice

MOTORE DIESEL	DIESEL ENGINE	
Potenza	Power	CAT C2.2 - Stage V - Tier 4 F - 55 Kw (74 Hp)
ANTENNA	MAST	
Corsa testa di rotazione	Rotary head stroke	2500-3500 mm (8,2-11,5 ft)
Tiro	Pull-up	4000 daN (8992 lbf)
Spinta	Pull-down	2500-4000 daN (5620-8992 lbf)
TESTA ROTANTE	ROTARY HEAD	
Coppia max.	Max. torque	740 daNm (5457 ft lbf)
Velocità max.	Max. speed	1000 rpm
MORSA	CLAMP	
Diametro	Diameter	40-250 mm (1,6"-9,9")
PESO	WEIGHT	~3700 Kg (~8157 lbf)

MD PL G

Compact, Flexible
Powerful.



MD PL G

Compact, Flexible, Powerful.



ACCESSORI - ACCESSORIES

Verricello	Main Winch	1000 daN 50 mt/min - (2248 lbf - 164 ft/min)
Verricello wire line	Wire line winch	800 daN - 110 mt/min - (1798 lbf - 361 ft/min)
Pompa Triplex	Triplex pump	150 lt/min - 30 bar - (40 gpm - 435 psi)
Pompa monovite	Screw pump	300 lt/min - 10 bar - (79 gpm - 145 psi)
Pompa schiuma	Foam pump	34 lt/min - 38 bar - (9 gpm - 550 psi)
Lubrificatore di linea	Line lubricator	8,5 lt/min (2,25 gpm)
SPT idraulico	Hydraulic SPT device	760 mm - 63,5 daN - (30" - 142 lbf)
Radiocomando	Remote radio control	-

ALTRI OPTIONAL DISPONIBILI A RICHIESTA - OTHER OPTIONALS ARE AVAILABLE ON REQUEST

